



CABIN & COCKPIT ENTRY HARDWARE

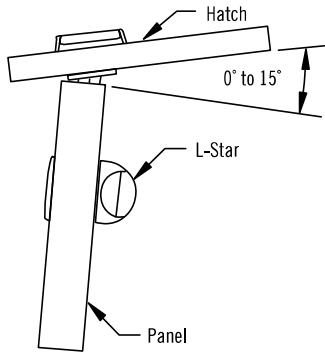

Striker

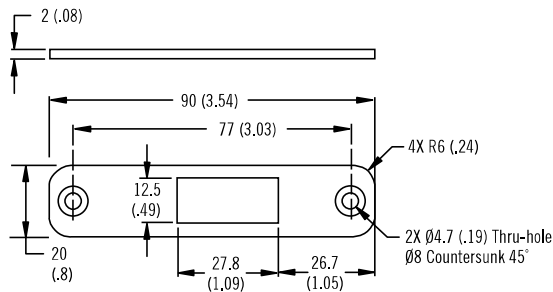


Striker Part number

MG-03-300-24

Panel Preparation


Minimum panel thickness without recess 19 (.75). Angle range between hatch and panel -7° to $+7^{\circ}$. No mounting hardware supplied.

Flush mount panel preparation shown

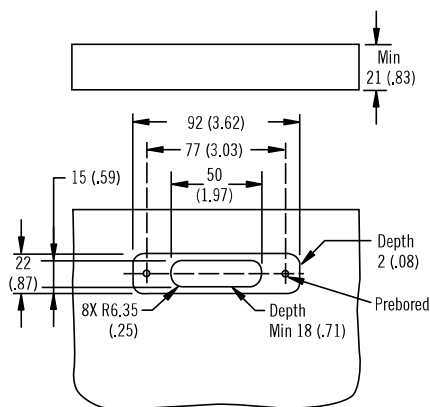

Striker Hood

The Striker Hood is designed for thin panels, or where the panel may not be suitable to directly attach the striker. Note: A striker must be used with the Striker Hood.

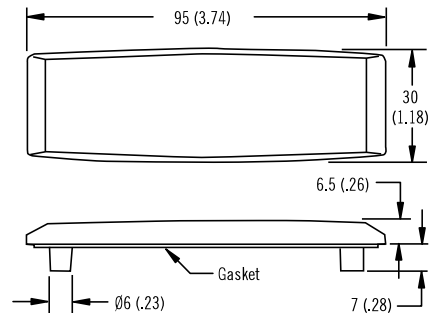

Striker Hood Part number

MG-03-330-24

Panel Preparation

