


CABIN & COCKPIT ENTRY HARDWARE

MG L-Star Entry Door Lock

A

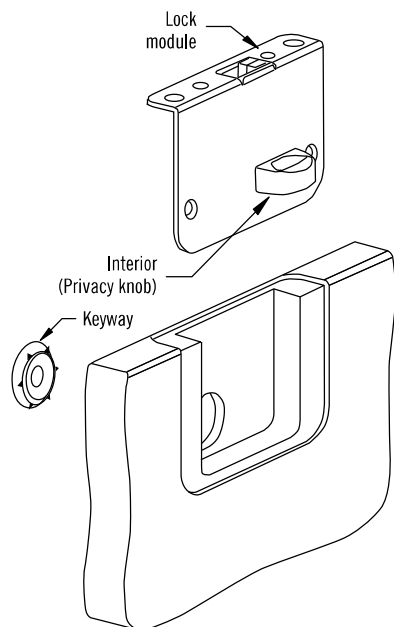

Part number

MG-03-630-24

Gain more stylish and more secure locking performance for specialised door applications in sail or motor boat and yacht construction. The Mobella L-Star is ideal for washboard entry ways – even those angled up to 7° beyond perpendicular – as well as for bi-fold doors and other cabin or entry doors. The security of the Star-Lock mechanism adds peace of mind, while all-marine-grade construction ensures robust performance.



- Enhance high-end security with the hard-to-compromise Star-Lock three-axis six-pin tumbler design
- Locks can be matched to other Southco deck latches
Contact Southco Marine for more information
- Simplify installation with slip-in mounting on the back edge of the door
- Satisfy customer preferences with a variety of decor options
- including diamond brass, polished chrome and satin finishes
- Accommodate door thicknesses from 19 mm to 45 mm without a recess, and engage with overhead hatches of 10 mm or thicker

Panel Preparation

Minimum panel thickness A 20 mm (0.71), Maximum panel thickness 44 mm (1.75).

No mounting hardware included.

Flush mount panel preparation shown

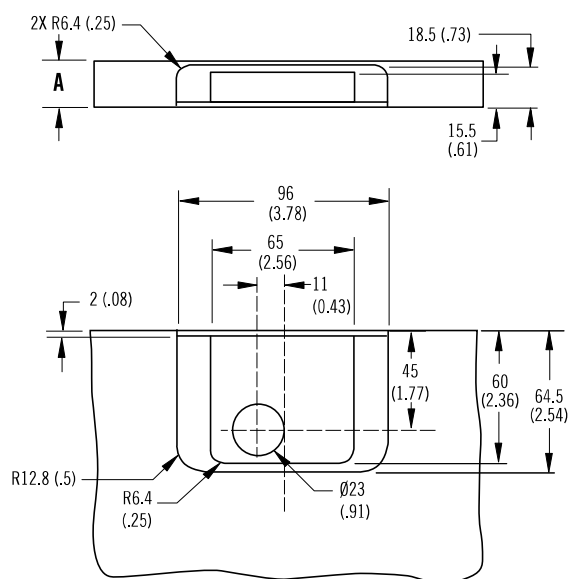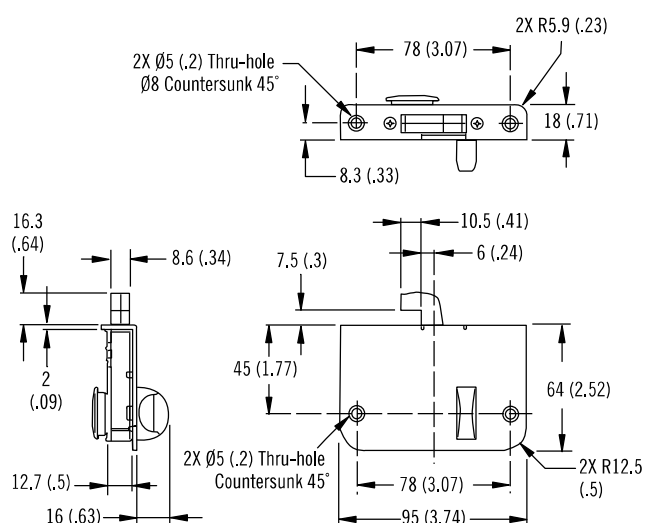



MG-03-300-24

Minimum panel thickness without recess 19 (.75). Angle range between hatch and panel -7° to $+7^{\circ}$. No mounting hardware supplied.

[illegible]

A

Technical drawing of the upper part of the container. The top view shows a rectangular shape with a length of 95 (3.74). The side view shows a height of 30 (1.18) and a thickness of 6.5 (0.26). A gasket is indicated on the side view. The bottom view shows a diameter of $\varnothing 6$ (0.23) for the base.

Striker Hood Part number

MG-03-330-24

Technical drawing of a mechanical part showing dimensions in inches and millimeters. The drawing includes a top view and a side view. The top view shows a rectangular part with a central slot. The side view shows the profile of the part with a rounded bottom. Dimensions are provided in inches and millimeters.

Dimensions:

- Top view:
 - Overall width: 77 (3.03)
 - Slot width: 50 (1.97)
 - Slot depth: 15 (.59)
 - Slot radius: 4X R6.35 (.25)
 - Slot hole diameter: 2X Ø8 (.32)
- Side view:
 - Minimum thickness: Min 10 (.4)