

Slim

Swing door lock – exterior or interior doors



Key locking mortise lock

- Traditional, robust lock mechanism design
- Key lockable from both sides using skeleton keys
- Door thickness range: 19 mm–45 mm (3/4” – 1 3/4”)

Included Striker

OS-02-200-10 – RO/LI Standard striker
 OS-02-300-10 – LO/RI Standard striker

Door holder options


Contact Onmar

Customizations

Multi action pawl version or other finish options
 Contact Onmar



Part number

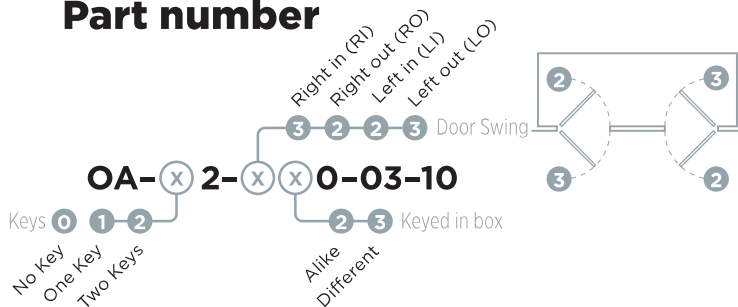

COLOR OPTIONS



FEATURES



Slim

Swing door lock – interior cabin or toilet doors

- Privacy locking mortise lock with indicator plate
- Door thickness range: 19 mm–45 mm (3/4" – 1 3/4")

Included Striker

OS-02-200-10- RO/LI Standard striker

OS-02-300-10 - LO/RI Standard striker

Door holder options


Contact Onmar



Part number

OA-02- 10-03-10

Right in (RI)
Right out (RO)
Left in (LI)
Left out (LO)



Product shown
OA-02-310-03-10

Striker
standard

COLOR OPTIONS



Chrome

FEATURES



Privacy knob



Privacy indicator outside



Swing door

Slim

Swing door lock – interior cabin doors

- Non locking mortise lock
- Door thickness range: 19 mm–45 mm (3/4" – 1 3/4")

Included Striker

OS-02-200-10- RO/LI Standard striker

OS-02-300-10 - LO/RI Standard striker

Door holder options


Contact Onmar



Part number

OA-02- 00-03-10

Right in (RI)
Right out (RO)
Left in (LI)
Left out (LO)



Product shown
OA-02-300-03-10

Striker
standard

COLOR OPTIONS



Chrome

FEATURES



Non-keylocking



Swing door