

## Swing door lock – exterior or interior doors



## Key locking mortise lock

- Traditional, robust lock mechanism design
- Key lockable from both sides using skeleton keys
- Door thickness range: 19 mm–45 mm (3/4" - 1 3/4")

### Included Striker

OS-02-200-10 – RO/LI Standard striker

OS-02-300-10 - LO/RI Standard striker

## Door holder options


Contact Onmar

## Customizations

Multi action pawl  
version or  
other finish options  
Contact Onmar



## Part number

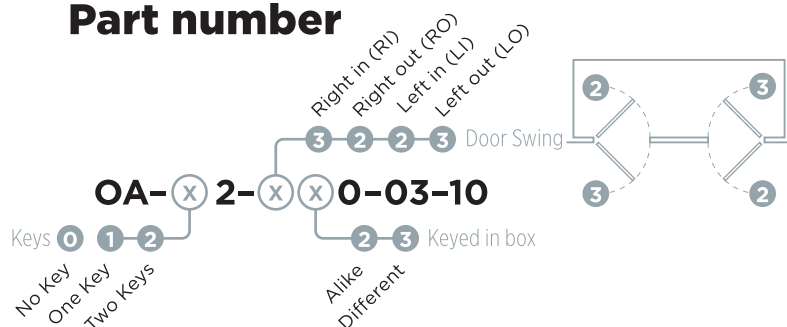

## COLOR OPTIONS



Chrome

## FEATURES



Swing door

# Slim

**Swing** door lock – interior cabin or toilet doors

- Privacy locking mortise lock with indicator plate
- Door thickness range: 19 mm–45 mm (3/4" – 1 3/4")

## Included Striker

OS-02-200-10– RO/LI Standard striker

OS-02-300-10 – LO/RI Standard striker


## Door holder options

Contact Onmar



## Part number

Right in (RI) 3  
Right out (RO) 2  
Left in (LI) 2  
Left out (LO) 3  
Door Swing  
OA-02-**x** 10-03-10



COLOR OPTIONS



FEATURES



# Slim

**Swing** door lock – interior cabin doors

- Non locking mortise lock
- Door thickness range: 19 mm–45 mm (3/4" – 1 3/4")

## Included Striker

OS-02-200-10– RO/LI Standard striker

OS-02-300-10 – LO/RI Standard striker


## Door holder options

Contact Onmar



## Part number

Right in (RI) 3  
Right out (RO) 2  
Left in (LI) 2  
Left out (LO) 3  
Door Swing  
OA-02-**x** 00-03-10



COLOR OPTIONS



FEATURES

