PRODUCT PAGE

For technical and availability information, please contact Onmar.
+46 (0) 16 42 86 80
info@onmar.se
www.onmar.se


FRICTION HINGE



Stainless Steel 316

- Provides constant torque throughout the entire range of motion.
- Holds door open at any desired angle without torque adjustment.
- Ideal for light-weight doors, such as overhead door, baitwell lid, glove box, interior door, anchor locker, electronic panel, etc.
- Passed 10,000 times cycle test and lost less than 10% on torque; 20,000 times lost only 20% or less.
- Passed 500-hour salt-spray test.

PATENTED

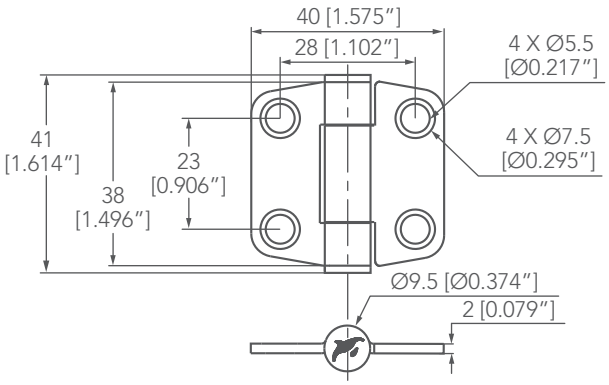

OT-50-0100-24

TYPE	SIZE
Center Barrel	38mm X 40mm 1-1/2" X 1-9/16" Screw : M4 Torque Range: 2.2±0.7N-m





PRODUCT PAGE


For technical and availability information, please contact Onmar.


+46 (0) 16 42 86 80
info@onmar.se
www.onmar.se



OT-50-0002-24


TYPE	SIZE
Barrel Up	37mm X 38mm 1-7/16" X 1-1/2" Screw : M4 Torque Range: 1.5±0.4N-m

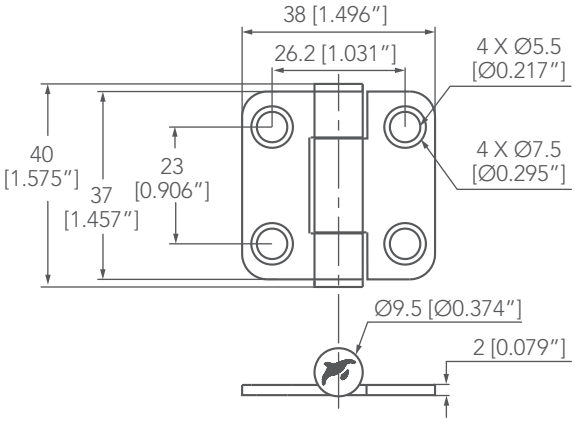



OT-50-0003-24

TYPE	SIZE
Barrel Up	37.2mm X 57mm 1-7/16" X 2-1/4" Screw : M4 Torque Range: 1.5±0.4N-m

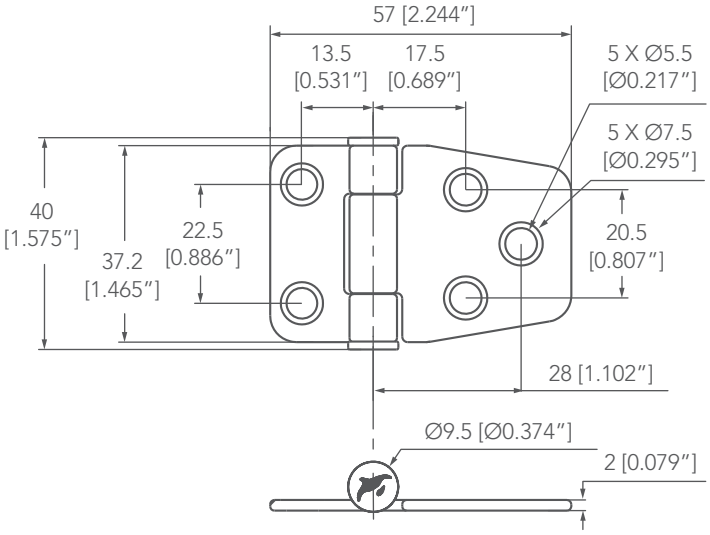



OT-50-0004-24

TYPE	SIZE
Barrel Up	40mm X 76.2mm 1-9/16" X 3" Screw : M4 Torque Range: 1.6±0.4N-m

