

PRODUCT PAGE

For technical and availability information,
please contact Onmar.

+46 (0) 16 42 86 80

info@onmar.se

www.onmar.se



CATCH PLUNGER



Rubber & PP

- Easy to install.
- Different holding power can be customized upon request.
- OB-12-0005-50: Engagement can be adjusted by reversing or removing the spacer under catch.
- Reusable marking punch is required for proper installation and warranty will be voided in the event one is not used.
- Marking punch should be replaced after prolonged use to ensure ongoing proper alignment during installation.
- Screw size of OB-12-0005-50: M4 or #8 for male part, and M5 or #10 for female part.
- Screw size of OB-12-0010-50/ OB-12-0015-50: M6 or 1/4" and M6 or 1/4" for female part.

OB-12-0005-50 CATCH HEIGHT

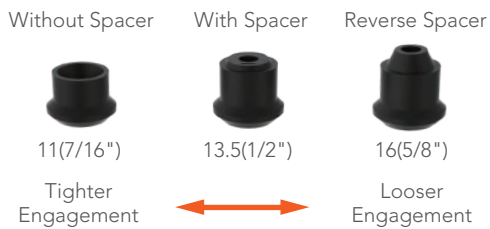

Part number	A (mm)	B	C	D	Holding Power
OB-12-0005-50	21	20	12,5	13,5	8 kg
OB-12-0010-50	39	31	25,4	27	10 kg
OB-12-0015-50	39	31	25,4	27	17 kg
OB-10-9001	Aluminum Marking Punch for OB-12-0005-50				
OB-10-9002	Aluminum Marking Punch for OB-12-0010-50 and OB-12-0015-50				

