
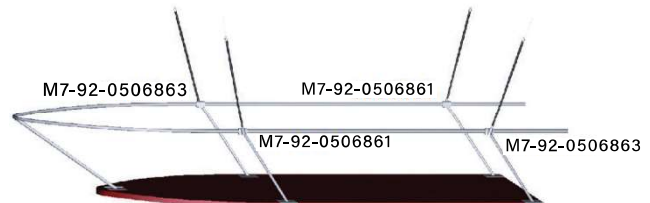


# SOCKET RAIL MOUNT

## Stainless Steel 316

- Socket should be installed where supports meet the horizontal rail to ensure stability and prevent movement and turning underway. Sockets should be installed facing the outside of the boat.
- Designed with a 15° vertical angle combined with an outboard angle pointing away from the bow/stern to create a self-tensioning system.
- Fits 32 mm horizontal rails and 25.5 mm support rail.
- Self-draining design.
- 6.35 mm - 20T Allen screws are included.



### PART NUMBER

	A mm	B mm	C mm
M7-92-0506861	80	61	32
M7-92-0506863	80	61	32

