# AH-2E Hinge

## Position control · Constant torque



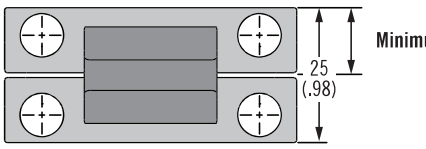


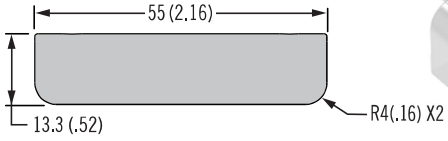


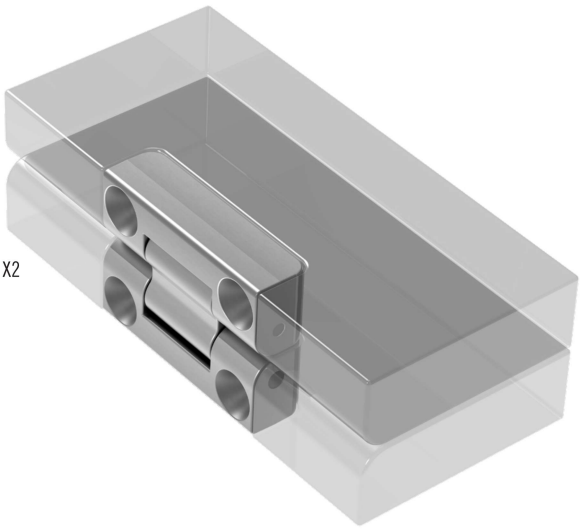

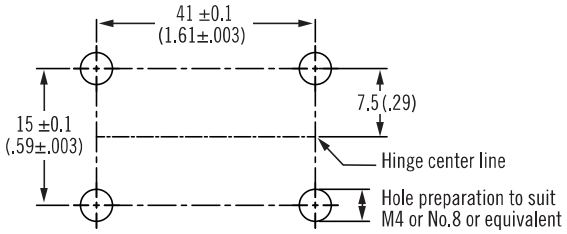


**Panel Preparation**

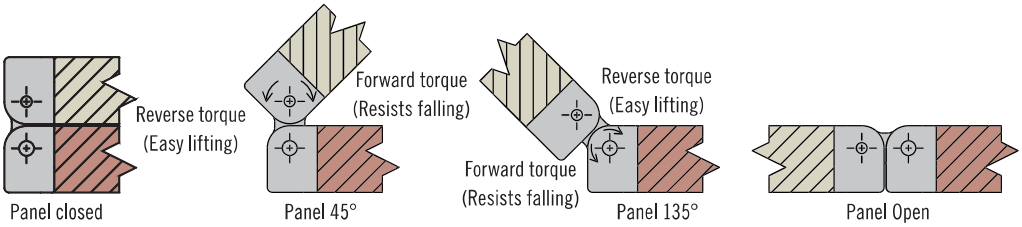





**AH - 2E - 12 XX A 2 - FF**

- **FF** Finish
  - **24** Stainless steel
- **XX** Torque

| Torque | Symmetric Torque N·m (in·lbf) |
|---|---|
| 00 | Free Operating |
| 04 | 0.3 (2.7) |
| 08 | 0.6 (5.3) |
| 12 | 1 (8.8) |

- **Smooth, zero backlash operation**
- **Space efficient design provides high torque in minimum space**
- **Constant torque, never needs adjusting**

### Material and Finish

Stainless steel and steel

### Performance Details

Cycle performance:
20,000 cycles within ±20% of static torque specification

### Installation Notes

Install hinge using 4x M4 or No 8 CSK screws or equivalent (not supplied). Ensure substrate and screw length is suitable for required application strength

### Part Number Selection

See table



Dimensions in millimeters (inch) unless otherwise stated