

CABIN & COCKPIT ENTRY HARDWARE

MR Omni Pocket Cabin Door Lock

A



DOOR THICKNESS: 32mm (1-1/4") or 35mm (1-3/8")


The Omni Pocket sliding-door lock is ideal for interior pocket doors and double-doors. It features an automatic latching mechanism, as well as a door-hold open feature. A hook on the forend side releases the door.

Other features include:


- Interior privacy button with exterior override
- Made of durable, corrosion-resistant stainless steel, ABS plastic, and aluminum
- Each assembly includes one striker and one door holder
- Only 3mm (1/8") protrusion
- Quick installation with a simple door cut-out

Available Options:


- Door Thickness: Options available for doors down to 22.2mm (7/8"). Contact Southco for details

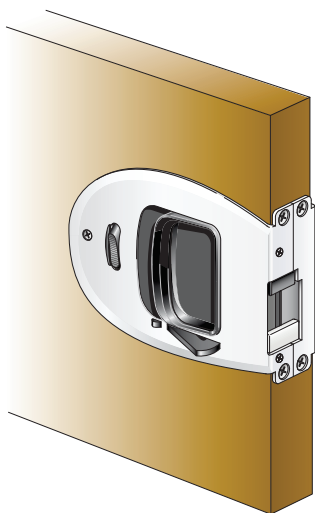


Door holder for Omni Pocket



Striker for Omni Pocket



	Imperial		Metric
	Nominal	Decimal	
A	Panel thickness		
B	3 21/32	3.661	92.5
C	4 11/16	4.685	119
D	3/8	0.375	9.5
E	2 5/32	2.157	55
F	63/64	0.984	25

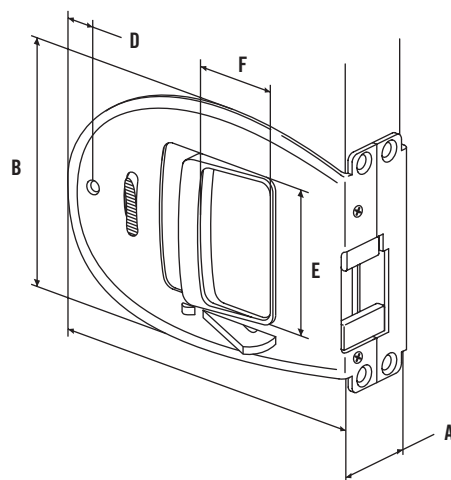

OMNI POCKET PART NUMBERS

Panel Thickness	22mm (7/8")	MR-06-123-24
	32mm (1 1/4")	MR-06-124-24
	35mm (1 3/8")	MR-06-125-24




CABIN & COCKPIT ENTRY HARDWARE


Panel Preparation

A

Left inside door Panel Preparation

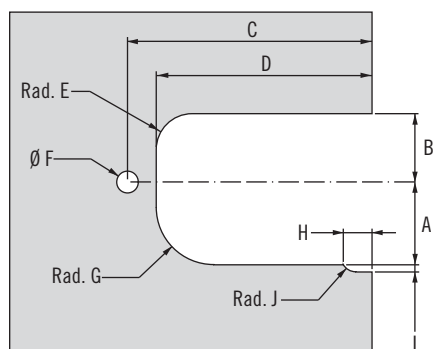


Right inside door Panel Preparation

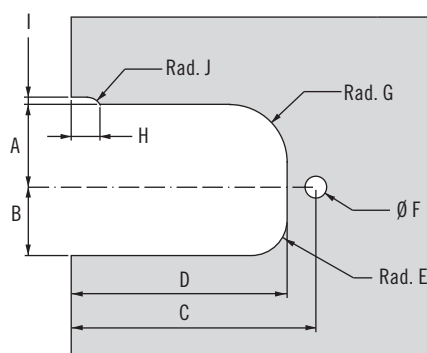




	Imperial		Metric
	Nominal	Decimal	
A	1 7/16	1.438	36.5
B	1 3/16	1.181	30
C	4 1/4	4.25	108
D	3 3/4	3.75	95.5
E	23/32	.71	18
F	3/8	.375	9.5
G	1	1	25.4
H	1/2	.51	13
I	1/8	.13	3.5
J	1/4	.24	6

Installation

1

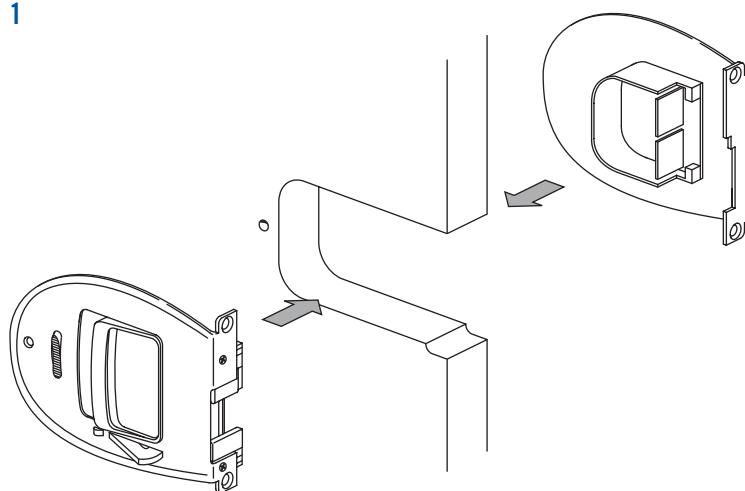

2

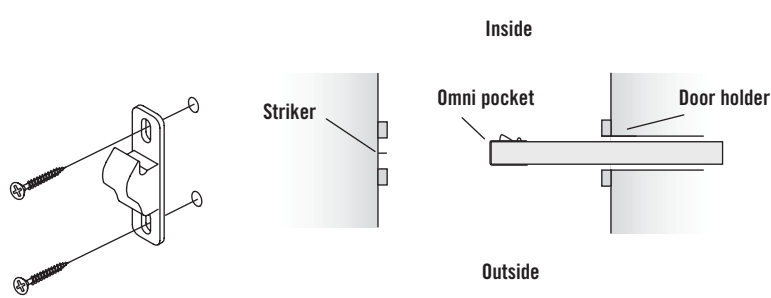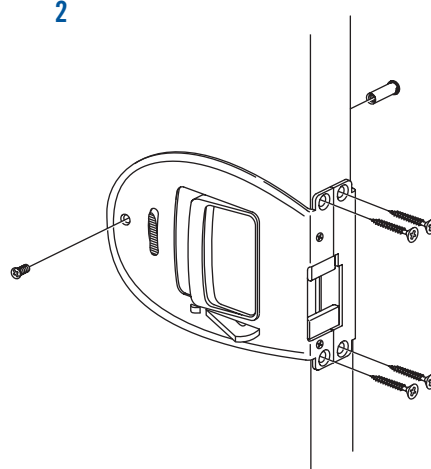


CABIN & COCKPIT ENTRY HARDWARE

MR Omni Pocket Cabin Door Lock

A

Applications

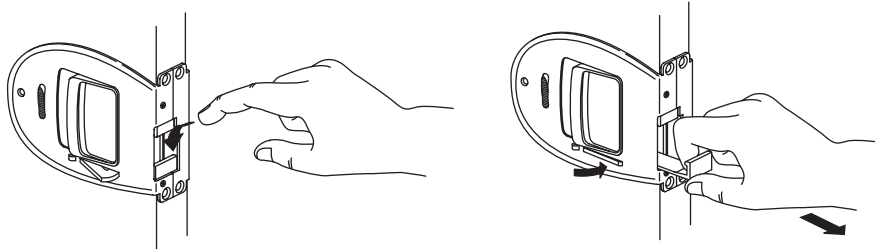

Privacy always on inside - as well as holder

