

For technical and availability information,
please contact Onmar.

+46 (0) 16 42 86 80
info@onmar.se
www.onmar.se




OT-56-0002-24



COVERED SEAM FRICTION HINGE

Stainless Steel 316

- Piano-style hinge provides constant torque throughout the entire range of motion.
- Holds door open at any desired angle without torque adjustment.
- Designed to fit various door sizes including overhead door, baitwell lid, glove box, access door, interior door, anchor locker, electronic panel, hatch, etc.
- Easy installation with 3M VHB double-sided tape.
- The cover can be removed by using a heat gun or hair dryer.
- Innovation and beauty combined.
- Passed 10,000 times cycle test and lost less than 20% on torque; 20,000 times lost 25% or less only.
- Passed 500-hour salt-spray test.
- Screw size M4 or #8.

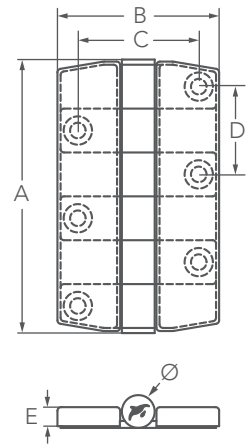

Part number	Leaves	A (mm)	B	C	D	E	Ø mm	Torque Range
OT-56-0001-24	Long	79,2	47	35	25,4	6	9,5	3,2±0,6N-m
OT-56-0002-24	Long	104,6	47	35	25,4	6	9,5	4,3±0,7N-m
OT-56-0003-24	Long	53,8	47	35	25,4	6	9,5	2±0,5N-m
OT-58-0300-24	Cover for hinge OT-56-0001-24							
OT-58-0301-24	Cover for hinge OT-56-0002-24							

